Features

- 30A Contact Change- over Capacity
- With Opening and Dust-Proof Type


Power Relay

JQX-30F □ DC12V

- DC12V — Coil Voltage:DC:6~220V AC:6~380V
- □ — Contact Ratings:1Z,1H,1D;2Z,2H,2D
- JQX-30F — Relay type



JQX-30F 1Z



JQX-30F 2Z



JQX-30FS 2Z

Contact Ratings

Contact Ratings	1Z,1H,1D/2Z,2H,2D
Contact Resistance	100MΩ (1A 6VDC)
Contact Material	AgCdO
Contact Capacity	30A,40A 250VAC/28VDC

Specification

Insulation Resistance	500MΩ.500VDC		
Dielectric Strength	BCC	2000VAC	1min
	BOC	1200VAC	1min
Operate Time	20ms/15ms		
Terminal Type	Terminal		

Coil Ratings


Nominal Coil Power	DC2.5W AC4.0VA


Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%
6	4.20	0.60	15
12	8.40	0.20	60
24	16.8	2.40	280
48	33.6	4.80	920
60	42.0	6.00	1440
110	88.0	11.0	4840

Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ± 10%
12	9.60	3.60	20
24	19.20	7.20	80
48	38.40	14.40	320
110	88.00	36.00	1700
220	176.00	72.00	6700
240	176.00	72.00	8060

Dimension.Bottom View

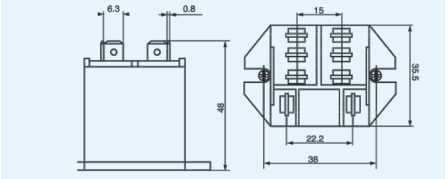

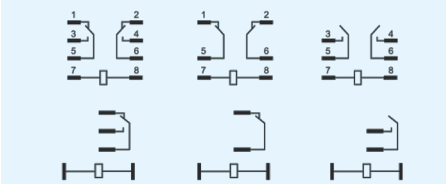

Reference Data

